



Screen Adjustment



Troubleshooting



6 Other Information
















Product Overview





Troubleshooting

Other Information

X To avoid injuries or damage to property, please read the following precautions carefully and use the product accordingly.



Failure to follow the instructions marked with this symbol may cause personal injury or even fatality.



Failure to follow the instructions marked with this symbol may cause personal injury or damage to the product or property.

| Power Related | Installation Related | Cleaning and Use Related |



[The images here are for reference only, and are not applicable in all cases (or countries).]



Warning



Insert the power plug firmly so that it does not come loose.

• When the connection is not firm, it may cause a fire.



Do not use loose power outlets or damaged power cables.

• There is a danger of electric shock or fire.



Under no circumstances touch the power plug with wet hands.

• There is a danger of electric shock.



Do not plug multiple devices into a single wall outlet.

• There is a danger of fire.



Do not bend the power cord excessively or place heavy objects on it.

• There is a danger of electric shock or fire.



Before moving the product, make sure the power is off and remove the power cord from the wall outlet. In addition, make sure all connection cables are disconnected from other devices before moving it.

 Moving the product without disconnecting the power cord may damage the power cord and cause electric shock or fire.

To disconnect the apparatus from the mains, the plug must be pulled out from the mains socket, therefore the mains plug shall be readily operable.







Notice



Always unplug the unit by holding the power plug. Pulling the power cable may damage the inside of it.

• There is a danger of fire.



Unplug the power plug before cleaning the product.

• There is a danger of electric shock or fire.

| Power Related | Installation Related | Cleaning and Use Related |





Warning



TO PREVENT THE SPREAD OF FIRE, KEEP CANDLES OR OTHER OPEN FLAMES AWAY FROM THIS PRODUCT AT ALL TIMES.

• There is a danger of fire.



When installing the product in a cabinet or on a shelf, make sure the front end of the base does not protrude.

• Dropping the product may damage it or cause injury.



Keep the power cord away from heaters.

• The coating of the power cord may melt and cause electric shock or fire.



Do not install the product in locations exposed to oil, smoke, moisture or water (rainwater), or in a vehicle.

• There is a danger of electric shock or fire.



Do not install the product in locations with poor ventilation such as a bookshelf, closet, etc.

• An increase in the internal temperature may cause a fire.



Do not install on an unstable location, or on a stand smaller than the product.

 If the product falls it may harm children. Install on a flat and stable location as the front part is heavy.



In case of thunder/lightning, disconnect the power cord from the wall outlet.

• There is a danger of electric shock or fire.





Make sure the product's vents are not blocked by a table cloth or curtain.

• An increase in the internal temperature may cause a fire.



Place the product on the ground carefully.

• Doing so may cause damage or injury.



Do not drop the product while carrying it.

• Doing so may cause damage or injury.



Keep the product out of children's reach.

• If the product falls it may cause harm to children, Install on a flat and stable location as the front part is heavy.

| Power Related | Installation Related | Cleaning and Use Related |



Cleaning and Use Related





Do not insert any metal objects such as a fork, chopsticks, wires, gimlets, or inflammable objects such as paper into the vents, the PC/COMPOSITE port, the Power port or the Battery port.

This may cause electric shock or fire.
 If water or an alien substance enters the product, turn the product off, disconnect the power cord from a wall outlet and contact a Service Center.



Do not disassemble, or attempt to fix or modify the product.

• When the product requires repairs, contact a Service Center.



Do not use or keep the product near flammable sprays or other such substances.

• There is a danger of fire or explosion.




Do not place containers with water, vases, drinks, chemicals, small metal parts or heavy objects on the product.

 If water enters the product, it may cause electric shock, or fire and when heavy objects fall, they may cause injury.



Do not let children place objects such as toys or cookies on the product.

 If a child tries to reach for any of these objects, the product may fall and cause harm.



Do not look directly at the light of the lamp nor project the picture onto eyes.

• This is dangerous especially for children.



When you remove batteries from the remote, be careful that they are not swallowed by children. Keep batteries out of the reach of children.

• If swallowed, see a doctor immediately.



Notice



If the product emits smoke, unusual noise, or there is a burning smell, disconnect the power plug immediately, and contact a Service Center.

• There is a danger of electric shock or fire.



If the power plug pin or jack is exposed to dust, water or alien substances, clean it thoroughly.

• There is a danger of electric shock or fire.



When cleaning the product, disconnect the power cord and wipe the product using a soft dry cloth.

 Do not use any chemicals such as wax, benzene, alcohol, thinners, insecticide, air freshener, lubricant or detergent.



When not using the product for an extended period of time, disconnect the power plug.

 Otherwise, this may cause heat emission from the accumulated dirt or degraded insulation, leading to electric shock or fire.

Do not install the product in places with heavy dust, chemical substances, high or low temperatures, high humidity, or where it will be operated for a long period continuously etc.







If the product is dropped or the casing is damaged, turn the product off and unplug the power cord.

• This may cause electric shock or fire. Contact a Service Center.



Take care not to lose the lens cover of the product.

• The lens could get damaged.





Use only specified standard batteries. Do not use new and used batteries together.

 Incorrect polarity may cause a battery to break or leak and could lead to fire, injury, or contamination (damage).



Make sure to place your remote control on a table or desk.

 If you step on the remote control, you may fall and hurt yourself or the product may be damaged.

Correct Disposal of This Product (Waste Electrical & Electronic Equipment) - Europe only



(Applicable in the European Union and other European countries with separate collection systems)

This marking shown on the product or its literature, indicates that it should not be disposed with other household waste at the end of its working life. To prevent possible harm to the environment or damage to health from uncontrolled waste disposal, please separate this from other types of waste and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.









2 Product Overview





Troubleshooting

6 Other Information

| Product Features | Product Views | Remote Control | Product Specifications |

Product Features

Optical engine with advanced DLP technology

- 1280x768 panel has been adapted.
- 4 segment color wheel to implement optimal colors.
- 200W Lamp designed to improve luminance

Vivid colors

- Quality picture tuning focused on improving color - this unit aims at realizing color coordinates that meet broadcasting standards on video production.

03 Minimized fan noise and light leakage

- The airflow and fan installation structure are optimized to minimize fan noise and beam leakage.

Various Input Ports

- Connections to peripheral devices have been improved by adopting various input terminals such as an HDMI (HDCP supported) terminal, a Component terminal, and a MONITOR OUT terminal.

User adjustments

- This unit allows adjustment of each input port.
- The unit has a reference pattern that can be used for positioning and adjustment.

| Product Features | Product Views | Remote Control | Product Specifications |



Front/Upper Side



1. Indicators

- STAND BY (Blue LED)
- LAMP (Blue LED)
- TEMP (Red LED)
- * Refer to the LED Indications.

2. Focus Ring

Used for Focus Adjustment.

3. Remote Control Signal Receiver

4. Lens

5. Adjustable Feet

You can adjust the screen position by moving the 10.Select and Move Button(@/<^> adjustable feet up and down.

6. Zoom Knob

Used to enlarge or reduce image size.

7. POWER(**也**) Button

Used to turn the projector on or off.

8. SOURCE Button

Used to select input signals from the external sources.

9. MENU Button

Use this button to enter or exit a menu or to move forward in a menu.

Use this button to move to or select an item within a menu.



The buttons on the top of the projector are touch buttons.

Touch them lightly with your fingers to use them.

The label is attached to the bottom of the product.

Unpacking



Quick Installation Guide



Warranty Card/ Registration Card (Not available in all locations)



User Manual CD







LED Indications

STAND BY	LAMP	TEMP	Information
•	0	0	If you press the POWER button on the remote control or projector, the screen appears within 30 seconds.
•	•	0	The projector is in normal operating condition.
•	•	0	This state appears when the projector is preparing an operation after the POWER button on the projector or the remote control has been pressed.
0	•	0	The POWER button is pressed to turn off the projector, and the cooling system is in operation to cool off the inside of the projector. (Lasts for about 1 minute and 30 seconds)
0	0	•	Refer to Action 1 below if the cooling fan inside the projector is not in normal operation condition.
0	•	•	Refer to Action 2 below if the lamp cover protecting the lamp unit is not closed properly.
0	0	•	Power is turned off automatically when temperature inside of the projector goes beyond the control limit. Refer to Action 3.
•	•	•	A problem has occurred when operating the DDP IC in the product. Refer to Action 4.
•	•	0	A problem has occurred with the operation of the lamp. Refer to Action 5.
•	•	•	The lifetime of the lamp has expired. Refer to Action 6.
•	•	0	The memory in the product is not operating normally. Contact a service center.
•	•	•	The power for the product is not operating normally. Contact a service center .
•	•	•	A problem has occurred when operating the color wheel in the product. Refer to Action 4.

Clearing Indicator Problems

Classification	State	Measures
Action 1	When the cooling fan system is not in normal operating condition.	If the symptom remains even after disconnecting and then reconnecting the power cord and turning the projector on again, contact your product provider or our service center .
Action 2	When the lamp cover protecting the lamp unit is not properly closed or the sensor system is not in normal operating condition.	Check whether the screws at the bottom side of the projector are fastened correctly. If they are abnormally fastened, contact your product distributor or service center .
Action 3	When temperature inside of the projector becomes too high.	Adjust the installation state of your projector by referring to the Installation Precautions section listed above. Cool down your projector sufficiently and then operate it again. If the same problem occurs continually, contact your product distributor or service center.
Action 4	When the color wheel fails to operate.	Disconnect and reconnect the power cord and start the projector again. If the same symptom still occurs, contact your product distributor or service center.
	The lamp	

malfunctions after power turns off

Action 5 abnormally or after powering on right after

Turn the power off, wait for a sufficient amount of cooling time and then turn the power on to operate. If the same problem occurs continually, contact your product distributor or service center.

Action 6 When the screen becomes darker

turning off the projector.

Check the lamp usage time on the Information Display screen. If you need to replace the lamp, contact your product distributor or service center.



This Projector uses a cooling fan system to keep the unit from overheating. Operation of the cooling fan may cause noise, which does not affect the product performance and is part of normal operation.

Pear Side



1. RS-232C port (For service input terminals)

6. HDMI/DVI IN Input port

2. SERVICE Input port

7. MONITOR OUT terminal

3. VIDEO IN Input port

8. PC IN Input port


4. S-VIDEO IN Input port

9. COMPONENT IN Input port

| Product Features | Product Views | Remote Control | Product Specifications |

5. Remote Control Signal Receiver

10.POWER Input port

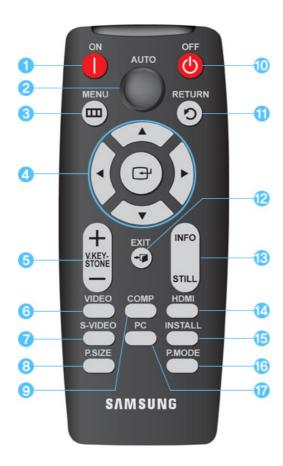

- 1. ON (|) Button
- 2. AUTO Button
- 3. MENU (III) Button
- 4. Move (▲ ▼ ◀ ▶)/(••) Button
- 5. V.KEY-STONE(+/-) Button
- 6. VIDEO Button
- 7. S-VIDEO Button
- 8. P.SIZE Button
- 9. COMP Button
- 10. OFF ((b)) Button
- 11. RETURN () Button
- 12. EXIT (→) Button
- 13. INFO STILL Button
- 14. HDMI Button
- 15. INSTALL Button
- 16. P.MODE Button
- 17. PC Button

1. ON (|)

Used to turn on the projector.

2. AUTO

Adjusts the Picture automatically. (Available in PC Mode Only)

3. MENU ()

Used to display Menu Screen.

4. Move (▲ ▼ ◀ ▶)/ (←)

Used to move to or select each menu item.

5. V.KEY-STONE (+/-)

Use this when video scenes are distorted or tilted.

6. VIDEO

Used to switch to VIDEO Mode.

7. S-VIDEO

Used to switch to S-VIDEO Mode.

8. P.SIZE

Used to adjust the size of picture screen.

9. COMP

Used to switch to COMPONENT Mode.

10. OFF ((**b**))

Used to turn off the projector.

11. RETURN (🔊)

Returns to the previous menu.

12. EXIT (→ 🔳

Used to make Menu Screen disappear.

13. INFO STILL

INFO: Used to check source signals, picture setup, PC screen adjustment and lamp lifespan. STILL: Used to see still images,

14. HDMI

Used to switch to HDMI Mode.

15. INSTALL

Used to flip or reverse the projected image.

16. P.MODE

Used to select Picture Mode.

17. PC

Used to switch to PC Mode.

| Product Features | Product Views | Remote Control | Product Specifications |

Product Specifications

Design and specifications of the product may be modified without prior notice for better performance.

Specifications

Model		SP-A400B	
	Size	16.5 mm /	0.65 inch
Panel	Resolution	WXGA (128	80 x 768)
	Manufacturer	Texas Instr	ument
	Type	200W UHP	(Theater mode: 172W)
Lamp	Life Time	3,000 Hour	s (Theater mode : 3,250 hr)
	Manufacturer	Philips	
Color		18.9 M (10	24 x 768 x 3 x 8bit)
	Optimum resolution	1280 x 768	@ 60Hz
Resolution	Maximum resolution	1280 x 102	4 @75Hz
Input video sigr	nal	Video, S-V	ideo, Component, Analog PC, HDMI
Input synchroni	zation signal	Separate H	/V sync, TTL
Maximum Pixel	Clock	136.75 MH	z
Diagonal scree	n size	40 ~250 in	ch
Projection Rang	je	0.3 ~9.8 m	
Power	Power Consumption	Less than 2	280W
	Voltage	110/220 Va	ac +/-10 %, 50/60 Hz +/-3 Hz
Noise		Theater: 2	8dB, Bright : 32dB
Dimensions			W)x162.4 mm(H)x347.2 mm(D) s(W) x 6.4 inches(D) x 13.7 inches(H)
Weight		4.5 kg / 9.9	9 lb
	Brightness	Max 2,000	ANSI lumen
Key Features	Contrast	2,500:1	
	Keystone	Vertical	
User	Temperature	Operating	Temperature 32 °F \sim 104 °F (0 °C \sim 40 °C), Humidity (10 % \sim 80 %)
Environment	and Humidity	Storage	Temperature -4 °F \sim 113 °F (-20 °C \sim 45 °C) , Humidity (5 % \sim 95 %)



This Class B equipment is designed for home and office use. The equipment has been registered regarding EMI for residential use. It may be used in all areas. Class A is for office use. Class A is for business while class B emits less electromagnetic waves than class A.



visual display elements, the DMD Panel may include a few bad pixels. Samsung and the DMD Panel manufacturer have a rigid, bad pixel identification and limitation procedure in place and products will not exceed the maximum number of bad pixels set by our standards. Rarely, non-displayable pixels may exist, however it does not affect the picture quality nor the lifespan of the product.

Supported Display Modes

	Resolution	Horizont	al Sync	Vertica	Sync	Pixel	
nput Source	(HxV)	Frequency [kHz]	polarity	Frequency [Hz]	polarity	Frequency [MHz]	Sync Type
	C40V2E0	31.47	Р	70.1	N	25.18	Sep.
	640X350	37.86	Р	85.1	Ν	31.5	Sep.
	640X400	37.86	N	85	Р	31.5	Sep.
		31.47	N	60	N	25.175	Sep.
		35.00	N	66.7	N	30.24	Sep.
	640X480	37.86	N	72.8	N	31.5	Sep.
		37.5	N	75	N	31.5	Sep.
		43.27	N	85	N	36	Sep.
	720X400	31.47	N	70	Р	28.322	Sep.
		35.16	Р	56.3	N	36	Sep.
		37.88	Р	60	Р	40	Sep.
	800X600	48.08	Р	72.2	Р	50	Sep.
		46.87	Р	75	Р	49.5	Sep.
PC		53.67	Р	85	Р	56.25	Sep.
	832X624	49.73	N	75	N	57.28	Sep.
	002/024	48.36	N	60	N	65	Sep.
		56.4	N	70	N	75	Sep.
	1024X768	60.02	Р	75	Р	78.75	
			Р		Р		Sep.
	11500004	68.68		85		94.5	Sep.
	1152X864	67.5	Р	75 75	Р	108	Sep.
	1152X870	68.68	N	75	N	100	Sep.
	1280X768	47.78	N -	60	P	79.5	Sep.
	1280X960	60	Р	60	Р	108	Sep.
	1280X1024	63.98	Р	60	Р	108	Sep.
		79.98	Р	75	Р	135	Sep.
	1440X900	55.94	N	60	Р	106.5	Sep.
		70.64	N	75	Р	136.75	Sep.
	1920X1080i	33.72	Р	60	Р	74.18	Sep.
		28.125	Р	50	Р	74.25	Sep.
Component	1280x720p	45	Р	60	Р	74.25	Sep.
Jompononi	120001200	37.5	Р	50	Р	74.25	Sep.
	720x480p	31.5	Р	60	Р	27	Sep.
	720x576p	31.25	Р	50	Р	27	Sep.
	640X350	31.47	Р	70.1	Ν	25.18	Sep.
	040/330	37.86	Р	85.1	Ν	31.5	Sep.
	640X400	37.86	N	85	Р	31.5	Sep.
	6407400	31.47	N	60	Ν	25.175	Sep.
	640X480	37.5	N	75	Ν	31.5	Sep.
	720X400	31.47	N	70	Р	28.322	Sep.
	0001/000	37.88	Р	60	Р	40	Sep.
	800X600	46.87	Р	75	Р	49.5	Sep.
		48.36	N	60	N	65	Sep.
ПОМ	1024X768	60.02	Р	75	Р	78.75	Sep.
HDMI	1280X768	47.78	N	60	Р	79.5	Sep.
	1280X960	60	Р	60	Р	108	Sep.
		63.98	Р	60	Р	108	Sep.
	1280X1024	79.98	Р	75	Р	135	Sep.
		33.72	P	60	P	74.18	Sep.
	1920x1080i	28.125	P	50	' Р	74.15	Sep.
		45	Р	60	Р		
	1280x720p					74.25	Sep.
	700 10-	37.5	Р	50	Р	74.25	Sep.
	720x480p	31.5	Р	60	Р	27	Sep.

720x576	р 31.25	Р	50	Р	27	Sep.
720x480	i 15.73	Р	60	Р	13.5	Sep.
720x576	i 15.63	Р	50	Р	13.5	Sep.

Supported Resolution/Size Modes

△ : Size & Ove	rscan can b	e configured,	x:Size & (Overscan ca	nnot be conf	igured, 🔾: Siz	ze can be	configured
	Source				Pictur	e Size		
Input	Type	Mode	Full	16:9	Zoom1	Zoom2	4:3	Wide fit
	HD	1080i	\triangle	\triangle	\triangle	\triangle	\triangle	Δ
	HU	720p	\triangle	\triangle	\triangle	\triangle	\triangle	Δ
		576p	\triangle	\triangle	\triangle	\triangle	\triangle	X
HDMI	20	480p	\triangle	\triangle	\triangle	\triangle	\triangle	X
	SD	576i	\triangle	\triangle	\triangle	\triangle	\triangle	X
		480i	\triangle	\triangle	\triangle	\triangle	\triangle	X
	PC	VESA	0	0	Х	Х	0	X
	HD	1080i	\triangle	\triangle	\triangle	\triangle	\triangle	\triangle
	пи	720p	\triangle	\triangle	\triangle	\triangle	\triangle	\triangle
Component		576p	\triangle	\triangle	\triangle	\triangle	\triangle	X
Component	20	480p	\triangle	\triangle	\triangle	\triangle	\triangle	X
	SD	576i	\triangle	\triangle	\triangle	\triangle	\triangle	X
		480i	\triangle	\triangle	\triangle	\triangle	\triangle	X
VIDEO	20	576i	0	0	\triangle	\triangle	0	X
& S-VIDEO	SD	480i	0	0	\triangle	\triangle	0	X
	LID	1080i	0	0	Х	Х	0	X
	HD	720p	0	0	Х	Х	0	X
		576p	0	0	Х	Х	0	X
	SD	480p	0	0	Х	Х	0	X
PC	30	576i	0	0	Х	Х	0	X
	1 0	480i	Ο	Ο	Х	Х	0	X
	PC	16:9 Mode	0	Ο	Х	Х	Ο	Х
	FG	4:3 Mode	0	0	Х	Х	0	Х

Picture Position Modes

♦ Overscan : Off

 $\ensuremath{\triangleright}$ The position of the screen is not moved in HDMI input mode.

	Source				Pictu	re Size		
Input	Туре	Mode	Full	16:9	Zoom1	Zoom2	4:3	Wide fit
	HD	1080i	X	×	Х	X	×	×
	HD	720p	X	×	Х	X	×	×
		576p	Х	X	Х	Х	X	X
HDMI	SD	480p	Х	X	Х	Х	X	X
	3D	576i	Х	X	Х	Х	X	X
		480i	Х	X	Х	Х	X	X
	PC	VESA	Х	X	Х	Х	X	X
	HD	1080i	0	0	0	0	0	0
	ПО	720p	0	0	0	0	0	0
Component	SD	576p	0	0	0	0	0	X
Component		480p	0	0	0	0	0	X
		576i	0	0	0	0	0	X
		480i	0	0	0	0	0	X
VIDEO	SD	576i	Х	X	Х	Х	X	X
& S-VIDEO	3D	480i	X	X	Х	X	X	X
	HD	1080i	0	0	Х	Х	0	X
	Пυ	720p	0	0	Х	X	Ο	X
		576p	0	0	Х	Х	0	X
	SD	480p	0	0	Х	Х	0	Х
		576i	0	0	Х	Х	0	×

		480i	0	0	X	×	0	×
PC	PC	16:9 Mode	Ο	Ο	Х	×	0	х
	FC	4:3 Mode	0	0	Х	×	0	Х

♦ Overscan : On

> The position of the screen is not moved in PC input mode.

	Source				Pictu	re Size		
Input	Type	Mode	Full	16:9	Zoom1	Zoom2	4:3	Wide fit
	HD	1080i	0	0	0	0	0	0
	HU	720p	0	0	0	0	Ο	0
		576p	0	0	0	0	Ο	X
HDMI	SD	480p	0	0	0	0	Ο	×
		576i	0	0	0	Ο	Ο	X
		480i	0	0	0	0	Ο	×
	PC	VESA	X	X	Х	Х	X	×
	HD	1080i	0	0	0	0	Ο	0
	HU	720p	0	0	0	0	Ο	0
Component		576p	0	0	0	0	Ο	X
Component	omponent SD	480p	0	0	0	0	Ο	X
		576i	0	0	0	0	Ο	X
		480i	0	0	0	0	Ο	X
VIDEO	SD	576i	0	0	0	0	Ο	X
& S-VIDEO	00	480i	0	0	0	0	Ο	X
	HD	1080i	X	X	X	X	X	X
	HU	720p	X	X	X	X	X	X
		576p	X	X	X	Х	X	X
	SD	480p	X	X	X	Х	X	X
PC	00	576i	Х	X	X	Х	X	X
		480i	Х	X	X	Х	X	X
		16:9	×	X	×	x	×	×
	PC	Mode	^	^	^	^	Α	^
		4:3	X	X	X	х	×	X
		Mode						



















| Basic Settings | Connecting the Power | Connecting to video equipment |



Installing the Projector


Install the projector so that the beam from the projector is perpendicular to the screen.



- >> Place the projector so that the lens is at the center of the screen. If the screen is not vertically installed, the picture on the screen may not be a rectangle.
- Do not install the screen in bright surroundings. If the screen is too bright, the picture on the screen will not be displayed clearly.
- > When installing the screen in bright surroundings, use curtains.
- > You can install the projector in the following locations: Front-Floor / Front-Ceiling / Rear-Floor / Rear-Ceiling. (To view the installation position settings)
- 11 To view the picture when installing the projector behind the screen,

Install a semi-transparent screen.


Select Menu > Setup > Install > Rear-Floor



12 To view the picture when installing the projector in the front of the screen,

Install the projector at the side where you are watching the screen.

Select Menu > Setup > Install > Front-Floor



Zoom and Focus Adjustment



1 Zoom Knob 2 Focus Ring



- You can adjust the size of image within zoom range by manipulating the Zoom Knob.
- Focus the picture on the screen using the Focus Ring.



If your product is installed at a location out of the specified projection distance (refer to Screen Size and Projection Distance), the focus cannot be adjusted correctly.

Leveling with Adjustable Feet



For level placing of the projector, adjust the Adjustable Feet of the projector.



- \ref{Second} >> You may adjust the level of the projector up to 12 mm (average 3.4°) degrees.
 - _ >> Depending on the position of the projector, Keystone distortion of image may appear.


Screen Size and Projection Distance

Install the projector on a flat, even surface and level the projector using the adjustable feet to realize optimal picture quality. If images are not clear, adjust them using the Zoom Knob or Focus Ring, or move the projector forward and backward.

Screen size	Horizental	Vertical	Max	Min	Offset
(M:inch)	(X:mm)	(Y:mm)	(Z:mm)	(Z:mm)	(Y':mm)
10	218	131	392	326.7	11.1
20	436	261	784.1	653.4	22.2
30	653	392	1176.1	980.1	33.3
40	871	523	1568.2	1306.8	44.4
50	1089	653	1960.2	1633.5	55.5
60	1307	784	2352.3	1960.2	66.6
70	1525	915	2744.3	2286.9	77.8
80	1742	1045	3136.4	2613.6	88.9
90	1960	1176	3528.4	2940.3	100
100	2178	1307	3920.5	3267	111.1
110	2396	1438	4312.5	3593.8	122.2
120	2614	1568	4704.5	3920.5	133.3
130	2831	1699	5096.6	4247.2	144.4
140	3049	1830	5488.6	4573.9	155.5
150	3267	1960	5880.7	4900.6	166.6
160	3485	2091	6272.7	5227.3	177.7
170	3703	2222	6664.8	5554	188.8
180	3920	2352	7056.8	5880.7	199.9
190	4138	2483	7448.9	6207.4	211.1
200	4356	2614	7840.9	6534.1	222.2
210	4574	2744	8233	6860.8	233.3
220	4792	2875	8625	7187.5	244.4
230	5009	3006	9017.1	7514.2	255.5
240	5227	3136	9409.1	7840.9	266.6
250	5445	3267	9801.1	8167.6	277.7



 \gg This projector is designed to show images optimally on a 80 \sim 120 inch sized screen.

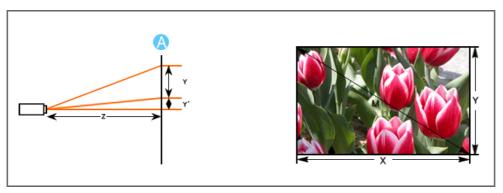

A. Screen



- > Z: Throw Distance
- >> Y': Distance from Lens Center to Image Bottom
- Setting up the PC Environment Check the following items before connecting your PC to your projector.
- Click the right mouse button on the Windows desktop and click on [Properties].
 - <Display Properties> tab will appear.


 Click on [Settings] tab and set the <Screen resolution> by referring to <Resolution> described in the display mode table supported by this projector.

You do not have to change <Color quality> setup.

- Press the [Advanced] button.
 Another property window will appear.
- Click on [Monitor] tab and set the <Screen refresh rate> by referring to <Vertical Frequency> described in the Supported Resolution/Size Modes table.

Set up both the vertical and horizontal frequency instead of <Screen refresh rate>.







 Click the [OK] button to close the window, and click the [OK] button of the <Display Properties> window to close the window.

The computer may restart automatically.

6. Shut down the PC and connect to the projector.



- Process might vary depending on your type of computer or Windows versions.
 (For example, [Properties] appears instead of [Properties (R)] as shown in 1.)
- > This unit appliance supports up to 24 bits per pixel in Color quality when it is used as a PC monitor.
- > Projected images may differ from the monitor depending on monitor manufacture or Windows versions.
- When connecting the projector to a PC, check that PC setup complies to display settings supported by this projector. If not, there may be signal problems.

| Basic Settings | Connecting the Power | Connecting to video equipment |





1. Rear of Projector

Plug the power cord into the power terminal on the rear side of the projector.



> When used outside of the U.S., HAR cord with fittings of an approved agency may be used.

Connecting to video equipment

Onnecting a DVD player/Cable/Satellite Box to HDMI/DVI



Connecting using an HDMI/DVI cable

Connect the [HDMI/DVI IN] terminal on the back of the projector and the DVI output terminal of the DVD player/Cable/Satellite box using a HDMI/DVI cable.

- Connecting using an HDMI cable


Connect the [HDMI/DVI IN] terminal on the back of the projector and the HDMI output terminal of the DVD player/Cable/Satellite box using a HDMI cable.

When the connection is finished, connect the power of your projector and DVD player/Cable/Satellite box.

Using the Projector

Turn on the projector and press the [HDMI] button to select <HDMI>.

Description of the Connecting a DVD player/Cable/Satellite Box via Component

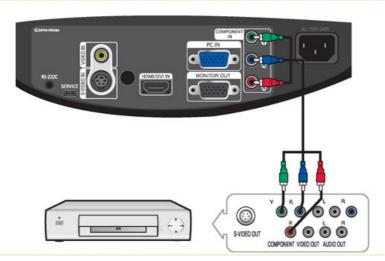


- Connect the [COMPONENT IN (Y/PB/ PR)] input port at the back of the projector to the Component port at the back of the DVD player/Cable/Satellite box with the Component cable.
- When the connection is finished, connect the power of your projector and DVD player/Cable/Satellite box.

Using the Projector

Turn on the projector and press the [COMP] button to select <Component>.



Onnecting to VCR/Camcorder

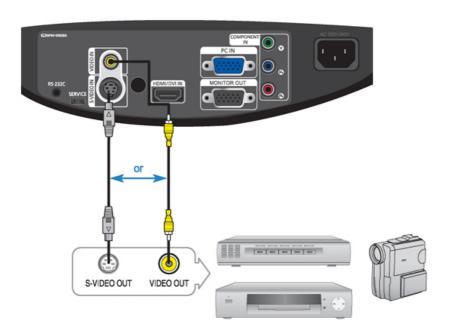

- Connect [VIDEO IN(yellow)] input port of the projector to the VIDEO (yellow) OUT port of video equipment using the
 - If the video equipment has S-VIDEO OUT port, connect it to [S-VIDEO IN] input port of the projector.
 Using the S-VIDEO connection, provides a higher visual quality.
- When finishing connecting the devices, connect the power of the projector and the VCR.


Using the Projector

- Turn on the projector and press the [Video] button to select <Video>.
- Press the [S-VIDEO] button to select S-Video.



- >> Check that the projector and the video equipment are turned off before connecting cables.
- > This projector does not support sound. (Separate audio system is needed for sound.)

Connecting to PC

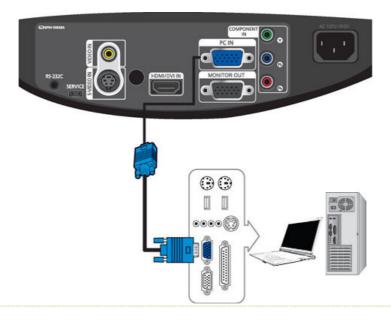

- Connect [PC IN] port on the rear side of the projector to the monitor output port of the PC using a PC video cable.
- When connections are all completed, connect both power cords of the projector and the PC.



> This product supports plug and play, therefore you do not need to install a driver on your PC.

Using the Projector


- Turn on the projector and press the [PC] button to select <PC>.

 If PC Mode is not available, check PC video cable is in place.
- Turn on the PC and set the PC Environment when necessary.
- O3 Adjust the screen.(Auto Adjustment)



Sound comes out from PC speakers.

Devices (Monitor, TV, etc.)

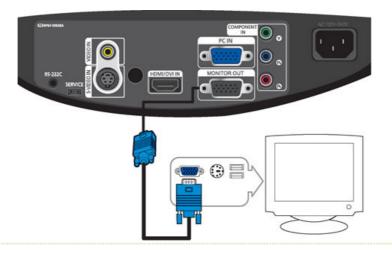

- When using the D-sub (analog) output through another video device (monitor, TV, etc.).
 - Connect the MONITOR OUT terminal of the projector and the D-sub terminal of the video device using a D-sub cable.
- 102 After connecting them, turn on your projector and the video device (monitor, TV, etc.).
 - > The MONITOR OUT function only operates when the projector is connected to an external device through the





| Input | Picture | Setup | Option |







* Click the Play()/Stop() button in the table below to view the video file.

Screen Adjustment		Description	Play/Stop
Source List	You can select a device conr	nected to the projector to display.	
	1) Component	4) PC	
	2) S-Video	5) HDMI	
	3) Video		
Edit Name	You can edit the names of de	evices connected to the projector.	
	1) Component	4) PC	
	2) S-Video	5) HDMI	
	3) Video		





R-Gain

G-Gain

B-Gain R-Offset

* Click the Play(3)/Stop(3) button in the table below to view the video file.

Screen Description Play/Stop Adjustment Select a screen state which is customized to your projector or change the screen mode Mode as required. 1) Mode Select this if you want the screen quality to be clearer than standard screen auality. You can comfortably view the projection screen if the surrounding is somewhat - Movie1, Movie2 Select this if your surroundings are dark. This saves energy and reduces eye fatigue. Mode Monitor Select this to use your monitor as a normal monitor. Select this when to enjoy a more vivid gaming experience. - Sports Provides the optimal picture quality for sports. You can enjoy more thrilling - User Select this if you want to view the screen in your customized screen Mode. You can set this in Mode-Save. ▶ The initial value is set to the brightest screen level. 2) Contrast: Used to adjust the contrast between the object and the background. 3) Brightness: Used to adjust brightness of the entire picture. 4) Sharpness: Used to adjust the sharpness of the picture. Contrast Brightness 5) Color: Used to adjust color lighter or darker. Sharpness ▶ You can only adjust Color in [S-Video] and [Video] modes. Color 6) Tint: Used to obtain more natural color of objects using Green or Red enhancement. ▶ You can only adjust Tint in [S-Video] and [Video] modes. 7) Color Temperature: You can change tint of the entire screen to suit your needs. - 5500K: Used to deliver optimal image quality for black-and-white films. Color temperature of the picture mode of Movie2 is set to 5500K. - 6500K: This temperature is used for most video productions. It is the default Color setting for Movie1, and may deliver the most precise tint. Temperature - 8000K: This color temperature is appropriate for very bright places and is the defaut setting for Dynamic Picture Mode. The sharpness and brightness are

- 9300K: The color temperature appropriate to very bright places such as a shop.

emphasized.

	1) Color Temperature	5) R-Offset	G-Offset B-Offset
	2) R-Gain	6) G-Offset	B-Onset
	3) G-Gain	7) B-Offset	
	4) B-Gain		
	8) Gamma: An image compens video properties.	eation function that controls the settings according to the	
	- Film: The best setting for	watching a film.	Camma
	- Video : The best setting fo	or watching a TV program.	Gamma
	- Graphic : The best setting	when you have a PC connected.	
	9) Save : Used to save custom	picture settings.	
			Save
	10) Reset : Restores the mode s	settings to the factory defaults.	Reset
Size	You can select a screen size ac ▶ Refer to "Size Support Mode".	3.	
	1) Full		
	2) 16:9		
	3) Zoom1		
	4) Zoom2		
	5) Wide Fit		
	6) 4:3		
Position	Adjust the screen position if it is ▶ Refer to "Position Moving Sup		
Digital NR	When a dotted line is displayed	or the screen shakes, you can view a better visual	
	quality picture by enabling Noise		
	▶ Digital NR can only be selecte	od in [Video], [S-Video], [Component] and [PC] modes.	
Black Level	video signal so that you can clea	you can set the light level of the darkest portion of the arly see dark areas on the screen. selected in [Video], [S-Video] and [HDMI] modes.	
	► For [Video] and [S-Video] M		
	1) 0 IRE: Sets the light level	of the darkest portion of the video signal to low. If the piput signal, the dark screen looks milky-white.	
	2) 7.5 IRE: Sets the light leve	el of the darkest portion of the video signal to high. If n the input signal, the dark screen is saturated and may	
	► For [HDMI] Mode		
	 HDMI-Video : Set the bright If the input signal is an 'Hi 	htness standard for dark signals to a low setting. DMI-Video' type, unclear screens are displayed	
		ess standard for dark signals to a high setting. DMI-PC' type, dark screens are displayed bright.	
Color Pattern	You can filter the color of the en	ntire screen according to your taste.	
	1) Off: Shows the picture in	the original color.	
		picture in black and white by filtering out all color	
		red by filtering out the green and blue color signals.	
		in green by filtering out the red and blue color signals.	
		n blue by filtering out the red and green color signals.	
Overscan		the edge of the picture when unnecessary information,	
	images annear on the edge of the	ne picture	
	images appear on the edge of the Refer to "Size Support Mode".		

2) On

Film Mode

Using this function, you can set the display mode optimized for playing movies.

▶ Film Mode is only supported for [Video], [S-Video] and [Component].

1) Off
2) On

| Input | Picture | Setup | Option |







* Click the Play()/Stop() button in the table below to view the video file.

Screen Adjustment	Description	Play/Stop
Install	To tailor the picture to the installation location, you can invert the projected images vertically/horizontally.	
	1) Front-Floor: Normal Image	
	2) Front-Ceiling: Horizontally Reversed Image	
	3) Rear-Floor: Vertically Reversed Image	
	4) Rear-Ceiling: Horizontal/Vertical Reversed Image	
Light Setting	Used to set the image brightness by adjusting the amount of light generated by the lamp.	
	1) Theater: Using this function, you can adjust the light level of the lamp so that you can comfortably watch pictures on the screen even when watching under dark conditions. It also lowers power consumption and extends the life of the lamp.	Theater
	2) Bright: Used to enhance the brightness in relatively bright ambient light. Since this mode increases the light level of the lamp, you may experience more noise which is produced when the projector is cooled down.	Bright
V-Keystone	If video scences are distorted or tilted, you can compensate for this using the vertical Keystone function.	
Test Pattern	Generated by the projector itself. Utilized as standard to optimize the installation of the projector.	Crosshatch
	1) Crosshatch: You can check whether the picture is distorted or not.	Screen Size

•		
	2) Screen Size: You can refer to picture format sizes such as 1.33:1 or 1.78:1.	
	3) Red: Red Screen, only for color adjustment.	Red
	4) Green: Green Screen, only for color adjustment.	
	5) Blue: Blue Screen, only for color adjustment.	Green
	6) White: White Screen, only for color adjustment.	
	7) 6500K_White: White Screen, shows brightest white color possible.	Blue
	► The Red/Green/Blue colors of the test patterns are only for the color adjustment procedures, and may not comply with the actual colors displayed during video playback.	White 6500K_White
PC	Eliminates or reduces noise that causes unstable screen quality, such as screen shaking. If the noise is not removed using Fine Adjustment, adjust the frequency to the maximum and then perform Fine Adjustment again.	Auto
	Only activated in the PC environment.	Adjustment Coarse
	 Auto Adjustment: Used to adjust frequency and phase of PC screen automatically. 	
	2) Coarse: Used to adjust frequency when vertical lines appear on PC screen.	Fine
	3) Fine: Used to fine tune the PC screen.	
	4) Zoom: Used to extend PC screen from the center.	Zoom
	5) Reset: Using this function, you can reset the PC menu settings to the factory default settings.	Reset
Color Standard	You may adjust the color standard to suit the color standard of the input signal.	
	 SMPTE_C: Standardized for Video Equipment by the Society of Motion Picture and Television Engineers 	
	2) HD: High Definition, 1125 scan lines, standard definition TV submitted to the ITU-R by U.S., Japan and Canada, in 1986.	
	3) EBU: Regulations and standards for European Broadcasting Production and Technology, standardized by the European Broadcasting Union.	
Factory Default	Using this function, you can reset various settings to the factory default settings.	

| Input | Picture | Setup | Option |







Screen Adjustment		Description	Play/Stop
Language	You can select the Language used for the menu screen.		
	1)English 2)Deutsch 3)Français 4)Italiano 5)Svenska	6)Español 7)Nederlands 8)Português 9) 中国语 10)한국어	
Menu Position	You can move Me	enu Position up/down/left/right.	
Menu Translucency	You can set the ti	ranslucency of menu.	
	 Opaque High Medium Low 		
Menu Display Time	You can set the d	isplay time of the menu.	
	1) 5 sec 2) 10 sec 3) 30 sec 4) 60 sec	5) 90 sec 6) 120 sec 7) Stay On	
LED Indicator	LCD, you can turn again will allow the projector. 1) Off: This man regardless of projector is 2) On: This man again.	s the LEDs On or Off. If the LEDs are affecting the brightness of the all the LEDs off by turning off this function. Turning the function on a LEDs to operate properly again according to the status of the mode disables the operating LED. However, the LED will come on the LED setting when the power is turned on or off or when the in an abnormal state. Ode enables the operating LED so that it can display the current that of the projector.	
Light Effect	You can turn the requirements. 1) Off: LED w 2) In Standby: 3) In Watching	LED indicators on your projector on or off according to your ill not come on. Turns the LED on in standby mode. TV: Turns the LED on while watching TV. D will come on after you turn the TV off.	
Blue sreen	The Blue screen f	ears as an ellipse at the top at the back of your projector. unction causes the screen to change to the Blue screen if there is no the external device connected to your projector.	
Information		sternal source signals, picture setup, PC picture adjustment and lamp	



















Before Contacting Service Personnel



Before Contacting Service Personnel

Installation and Connection

Symptoms	Troubleshooting
No Power.	Check the power cable connections.
I want to install my projector on the ceiling.	The ceiling installation support is sold separately. Contact your local product distributor.
External Source can not be selected.	Be sure that the connection cable(s) (video) is properly connected to the proper port. If the device is not connected properly, it can not be selected.

Menu and Remote Control

Symptoms	Troubleshooting	
Remote control does not work.	 Check whether your remote control is at a right angle and at the correct distance. Remove any obstacles between your remote control and the product. Direct lighting of 3-way light bulbs or other lighting device on the remote sensor of the projector may affect the sensitivity and cause the remote control to malfunction. Check if the remote control battery is empty. Check whether the LED indicator on the top of the projector is turned on. 	
I cannot select a menu.	Check if the menu is displayed in gray. A gray-colored menu is unavailable.	

Screen and External Source

Symptoms	Troubleshooting	
Cannot see picture images.	 Be sure that the power cord of the projector is connected. Be sure that the proper input source is selected. Check that the connectors are properly connected to the ports at the back of the projector. Check the Remote Control batteries. Be sure that the <color>, <brightness> settings are not at their lower limit.</brightness></color> 	
Poor color.	Adjust the <tint> and <contrast>.</contrast></tint>	
Images are not clear.	Adjust the focus.Check that the projection distance is either too far or too near to the screen.	
Strange noise.	If a strange sound continues, contact our service center.	
The operating LED is lit up.	Refer to Corrective Actions According to LED Indications.	
Lines appear on screen.	Because noise may occur when using your PC, adjust the frequency of the screen.	
No external device screen is displayed.	 Check the operating status for the external device and check whether the adjustment items, such as the Brightness and the Contrast have been changed correctly in the <mode> command screen of the Projector menu.</mode> 	
Only blue screen appears.	Be sure to properly connect the external devices. Check the connection cables again.	
Screen appears in black and white or	As mentioned above, check the adjustment items such as the Brightness,	

odd color./ screen is too dark or bright.

Contrast and Color in the menu.

• If you want to restore various settings to their factory defaults, run <Factory Default>from the menu.















Troubleshooting

6 Other Information

| Care and Maintenance | Contact SAMSUNG WORLDWIDE | Other | Authority |

Care and Maintenance

To clean the exterior and lens of the projector

Clean the projector using a soft dry cloth.

- Do not clean the projector with flammable substances such as benzene, thinners or a wet cloth, as these may cause problems.
- Do not touch the projector with a nail or any other sharp objects, as this may scratch the surface.



To clean the interior of the projector

For cleaning the interior of the projector, ask your Service Center or a distributor.

Contact your distributor or a Service Center if dust or other substances are inside the projector.



Lamp Replacement

Cautions on Lamp Replacement

- The projector lamp is an expendable item. For best operating performance, replace the lamp according to the usage time. You can view the lamp usage time in the Information Display (INFO button).
- Use the recommended lamp when replacing. Lamp specifications are defined in the user's manual. Replace with the same model provided with the projector.
 - Lamp Model Name: 200W Philips fusion lamp
 - Lamp Manufacture : Philips Lighting
 - Lamp Life Time: 3000Hrs
 - Lamp Type: 200W UHP
- Even after the power cord has been disconnected, the lamp will be hot. Allow it to cool down for at least 1 hour before changing the lamp.
- >> Before you turn the projector over to change the lamp, cover the projector with a soft cloth on a flat surface.
- Do not leave the old lamp near inflammables or in reach of children. There is a danger of burn or injury.
- >> Remove dirts or foreign materials around or inside the lamp unit using a proper vacuum device.
- When handling the lamp, avoid touching any part of it except for the handles. If you handle the lamp incorrectly, it may affect the screen quality and shorten its lifetime.

Lamp Replacement Procedure

- 1 The lamp is very hot and operates 2 The lamp is located at the bottom 3 Slide and open the cover in the with a high voltage. Allow it to cool down for at least 1 hour after disconnecting the power cord before changing the lamp.
 - of the product. Place the product so that its bottom looks upward and remove
 - the screws that hold the lamp cover in place.
 - * When placing the product with the bottom upwards, make sure to place a soft cloth on the floor to prevent scratches.
- direction of the arrow, as shown in the figure.





- 4 Remove the screw indicated in the 5 Hold and pull the lamp handle figure.
- slightly, as shown in the figure.







Assembling a new lamp is in the reverse order of the disassembly.

| Care and Maintenance | Contact SAMSUNG WORLDWIDE | Other | Authority |



If you have any questions or comments relating to Samsung products, please contact a SAMSUNG customer care center.

	North America	
U.S.A	1-800-SAMSUNG(726-7864)	http://www.samsung.com
CANADA	1-800-SAMSUNG(726-7864)	http://www.samsung.com/ca
MEXICO	01-800-SAMSUNG(726-7864)	http://www.samsung.com

	Latin America	
ARGENTINE	0800-333-3733	http://www.samsung.com/ar
BRAZIL	0800-124-421 4004-0000	http://www.samsung.com
CHILE	800-SAMSUNG(726-7864)	http://www.samsung.com/cl

COLOMBIA	01-8000112112	http://www.samsung.com.co
COSTA RICA	0-800-507-7267	http://www.samsung.com/latin
ECUADOR	1-800-10-7267	http://www.samsung.com/latin
EL SALVADOR	800-6225	http://www.samsung.com/latin
GUATEMALA	1-800-299-0013	http://www.samsung.com/latin
HONDURAS	800-7919267	
JAMAICA	1-800-234-7267	http://www.samsung.com/latin
NICARAGUA	00-1800-5077267	
PANAMA	800-7267	http://www.samsung.com/latin
PUERTO RICO	1-800-682-3180	http://www.samsung.com/latin
REP. DOMINICA	1-800-751-2676	http://www.samsung.com/latin
TRINIDAD & TOBAGO	1-800-SAMSUNG(726-7864)	http://www.samsung.com/latin
VENEZUELA	0-800-100-5303	http://www.samsung.com/latin

	Europe	
AUSTRIA	0800-SAMSUNG (726-7864)	http://www.samsung.com/at
BELGIUM	0032 (0)2 201 24 18	http://www.samsung.com/be
CZECH REPUBLIC	844 000 844	http://www.samsung.com/cz
	Distributor pro Českou republiku: Samsung Zrt., česka organizační složka	Vyskočilova 4, 14000 Praha 4
DENMARK	70 70 19 70	http://www.samsung.com/dk
EIRE	0818 717 100	http://www.samsung.com/ie
FINLAND	030-6227 515	http://www.samsung.com/fi
FRANCE	3260 SAMSUNG (€ 0,15/Min) 08 25 08 65 65 (€ 0,15/Min)	http://www.samsung.com
GERMANY	01805 - SAMSUNG (726-7864) (€ 0,14/Min)	http://www.samsung.com
HUNGARY	06-80-SAMSUNG (726-7864)	http://www.samsung.com
ITALIA	800-SAMSUNG (726-7864)	http://www.samsung.com
LUXEMBURG	0035 (0)2 261 03 710	http://www.samsung.com/be
NETHERLANDS	0900 SAMSUNG (726-7864) (€ 0,10/Min)	http://www.samsung.com/nl
NORWAY	815-56 480	http://www.samsung.com/no
POLAND	0 801 801 881 022-607-93-33	http://www.samsung.com/pl
PORTUGAL	80820-SAMSUNG (726-7864)	http://www.samsung.com/pt
SLOVAKIA	0800-SAMSUNG (726-7864)	http://www.samsung.com/sk
SPAIN	902 10 11 30	http://www.samsung.com
SWEDEN	0771-400 200	http://www.samsung.com/se
SWITZERLAND	0800-SAMSUNG (726-7864)	http://www.samsung.com/ch
U.K	0845 SAMSUNG (7267864)	http://www.samsung.com

ESTONIA	800-7267	http://www.samsung.ee
LATVIA	800-7267	http://www.samsung.com/lv
LITHUANIA	8-800-77777	http://www.samsung.lt
KAZAKHSTAN	8-10-800-500-55-500	http://www.samsung.kz
KYRGYZSTAN	00-800-500-55-500	
RUSSIA	8-800-555-55-55	http://www.samsung.ru
TADJIKISTAN	8-10-800-500-55-500	
UKRAINE	8-800-502-0000	http://www.samsung.com
UZBEKISTAN	8-10-800-500-55-500	http://www.samsung.uz

	Asia Pacific	
AUSTRALIA	1300 362 603	http://www.samsung.com
CHINA	800-810-5858 010-6475 1880	http://www.samsung.com
HONG KONG	3698 - 4698	http://www.samsung.com/hk
INDIA	3030 8282 1800 110011	http://www.samsung.com
INDONESIA	0800-112-8888	http://www.samsung.com
JAPAN	0120-327-527	http://www.samsung.com/jp
MALAYSIA	1800-88-9999	http://www.samsung.com/my
NEW ZEALAND	0800 SAMSUNG(726-7864)	http://www.samsung.com/nz
PHILIPPINES	1800-10-SAMSUNG(726-7864)	http://www.samsung.com/ph
SINGAPORE	1800-SAMSUNG(726-7864)	http://www.samsung.com
THAILAND	1800-29-3232, 02-689-3232	http://www.samsung.com
TAIWAN	0800-329-999	http://www.samsung.com/tw
VIETNAM	1 800 588 889	http://www.samsung.com

Middle East & Africa		
SOUTH AFRICA	0860-SAMSUNG(726-7864)	http://www.samsung.com
TURKEY	444 77 11	http://www.samsung.com
U.A.E	800-SAMSUNG(726-7864) 8000-4726	http://www.samsung.com

| Care and Maintenance | Contact SAMSUNG WORLDWIDE | Other | Authority |



Glossary

Analog Broadcast

 $An \ existing \ broadcasting \ signal \ transmitted \ by \ a \ broadcasting \ station \ in \ accordance \ with \ the \ NTSC \ standard.$

programs.

AV Receiver

An AV Receiver provides a number of input and output interfaces for audio and video so as to enable the user to connect and use various input and output devices.

Rlack Leve

Black Level sets the light level of the darkest portion of the video signal to match that of the display's black level capability so that users can clearly view dark visuals. If the setting does not match the input signal, the dark screen is saturated and may not display properly or the dark screen looks milky—white.

Cable Broadcast

Cable Broadcasts broadcasts programs via cable instead of radio waves. To view cable broadcasts, you have to subscribe to your local cable broadcast service provider and install an additional receiver.

Color Standard

A pre-determined default color standard determined by the broadcasting standard of the corresponding country or

Color Temperature

Color temperature is a simplified way to characterize the spectral properties of a light source. A low color temperature implies a warmer (more yellow/red) light while a high color temperature implies a colder (more blue) light.

➢ COMPOSITE IN Port

A COMPOSITE IN Port is a general video input port (yellow). Both chrominance and luminance are transmitted on the same 75-ohm cable.

Component Port (Green, Blue, Red)

The Component Port separately transmits the luminance signal.

Digital Broadcast

Digital Broadcast is a television broadcasting signal digitized and transmitted according to the United States terrestrial digital broadcast specifications, or ATSC.

DVD (Digital Versatile Disc)

DVD is a large capacity media disk that can save multimedia content such as video, games, audio applications, etc. using MPEG-2 video compression technology on a CD size disc.

DLP (Digital Light Processing)

DLP is a digital display technology using a DMD panel developed by TI (Texas Instruments) of the United States.

DLP HD2, DC2, DC3

This is a grade of DMD panel.

DMD (Digital Micromirror Device)

A DMD panel is an implementation of DLP technology. It consists of microscopic mirrors where each mirror represents a pixel.

External Input

External Input is connecting video devices such as a VCR, camcorder, DTV receiver, DVD, etc. to the projector as a video source.

Gamma Mode

Gamma Mode compensates the video signal produced for analog display devices such as a CRT (Cathode Ray Tube) so that the video signal can be clearly displayed on a digital display device.

➢ HDMI

- ▶ HDMI(High-Definition Multimedia Interface), is an interface that enables the transmission of digital audio and video signals using a single cable.
- ▶ The difference between HDMI and DVI is that the HDMI device is smaller in size and has the HDCP (High Bandwidth Digital Copy Protection) coding feature installed.

Overscan

Overscan cuts the edge of the picture when there is unnecessary information, images or noise at the edge of the picture. For extremely poor video signals, some unnecessary video signals may be displayed on the screen.

➢ RS-232C Port (Service Input Port)

This port is provided for service purposes. This port provides data communication in accordance with the RS-232C communication standard.

S-Video IN Port

This is called super video. S-Video is a type of video signal which has the video brightness and color signal separated in order to provide a better image quality.

Satellite Broadcast

Satellite Broadcast broadcasts programs via satellite so that the program can be viewed in all area in a high visual and sound quality. Approximately 100 channels including public broadcast channels are provided. To view satellite broadcasts, you have to install an additional receiver.

| Care and Maintenance | Contact SAMSUNG WORLDWIDE | Other | Authority |



Information in this document is subject to change without notice. © 2008 Samsung Electronics Co., Ltd. All rights reserved.

Reproduction in any manner whatsoever without the written permission of Samsung Electronics Co., Ltd. is strictly forbidden.

Samsung Electronics Co., Ltd. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

